


# Stavební připravenost pro samonosné posuvné brány do 8 m průjezdné šířky

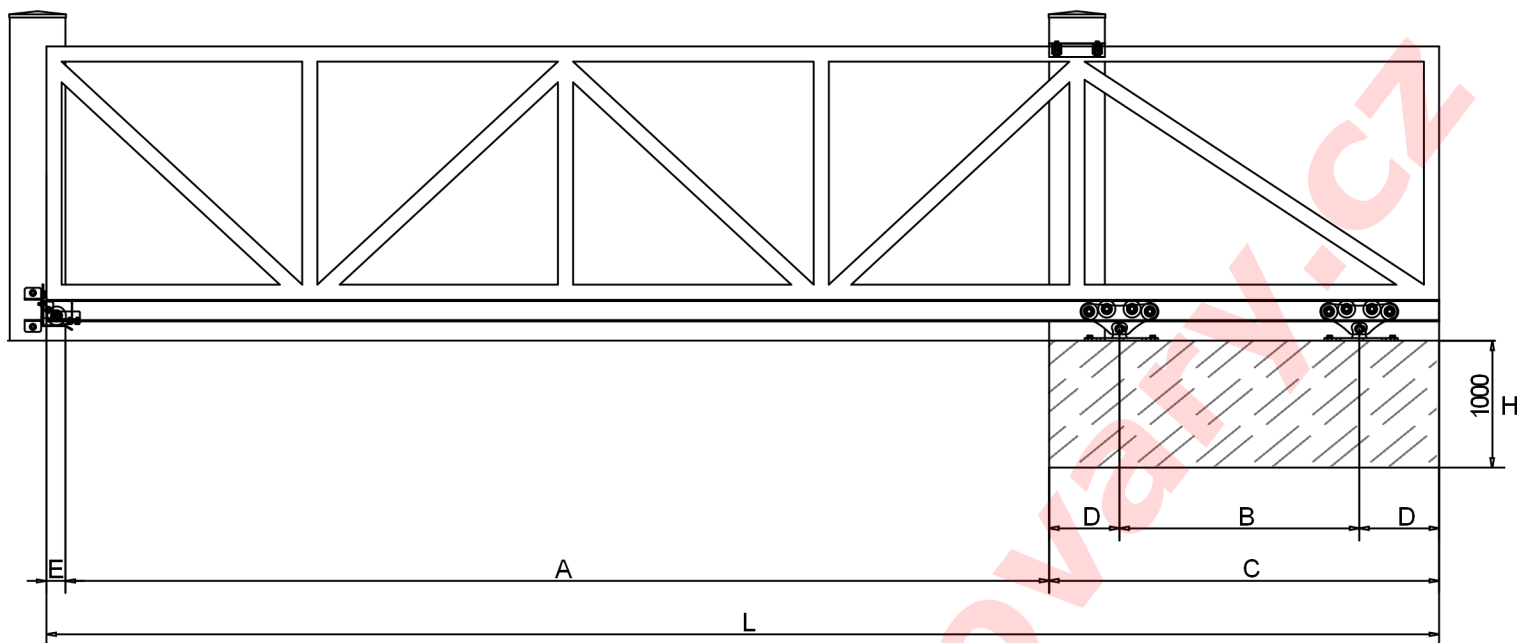

|                 | mm     | mm     | mm     | mm     | mm     | mm     | mm     | mm     | mm     |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| A               | 4000   | 4500   | 5000   | 5500   | 6000   | 6500   | 7000   | 7500   | 8000   |
| max. váha brány | 675 kg | 675 kg | 675 kg | 650 kg | 625 kg | 600 kg | 575 kg | 550 kg | 525 kg |
| B               | 1200   | 1350   | 1500   | 1650   | 1800   | 1950   | 2100   | 2250   | 2400   |
| C               | 1800   | 1950   | 2100   | 2250   | 2400   | 2550   | 2700   | 2850   | 3000   |
| D               | 300    | 300    | 300    | 300    | 300    | 300    | 300    | 300    | 300    |

$$L = A + B + (2 \times D) + E$$

Pro všechny zde uvedené velikosti bran platí tyto hodnoty pro betonovou základnu

|                                    | mm   |
|------------------------------------|------|
| <b>G</b> Šířka betonové základny   | 500  |
| <b>H</b> Hloubka betonové základny | 1000 |

