

TAKE  
AWAY



CAIS  
INNOVATION

1,05 m  
15 kg  
7,8 kg

PATENT OFFICE 

 **TWIN DRIVE - MANUAL**

TRACKLESS BI-FOLDING  
SWING GATE HARDWARE  
SPACE-SAVING FEATURE

### TWIN DRIVE 6.0

BI-FOLDING DOUBLE LEAF  
SWING GATE HARDWARE  
SPACE-SAVING FEATURE  
MAX. 3.0 m SINGLE LEAF  
SINGLE LEAF MAX. 110 kg  
HEIGHT MAX. 1,6 m  
CENTRAL HINGES INCLUDED

CODE:1710901



### TWIN DRIVE 3.0

BI-FOLDING SINGLE LEAF  
SWING GATE HARDWARE  
SPACE-SAVING FEATURE  
MAX. 3.0 m SINGLE LEAF  
SINGLE LEAF MAX. 110 kg  
HEIGHT MAX. 1,6 m  
CENTRAL HINGES INCLUDED

CODE:1710902

L max.	A	B	C min. / max	D min. / max.	E	F	H	SINGLE LEAF max. kg
3000	130	90	1000-1500	300 - 1500	100	250	1600	110

Valid for gate frame 60x40

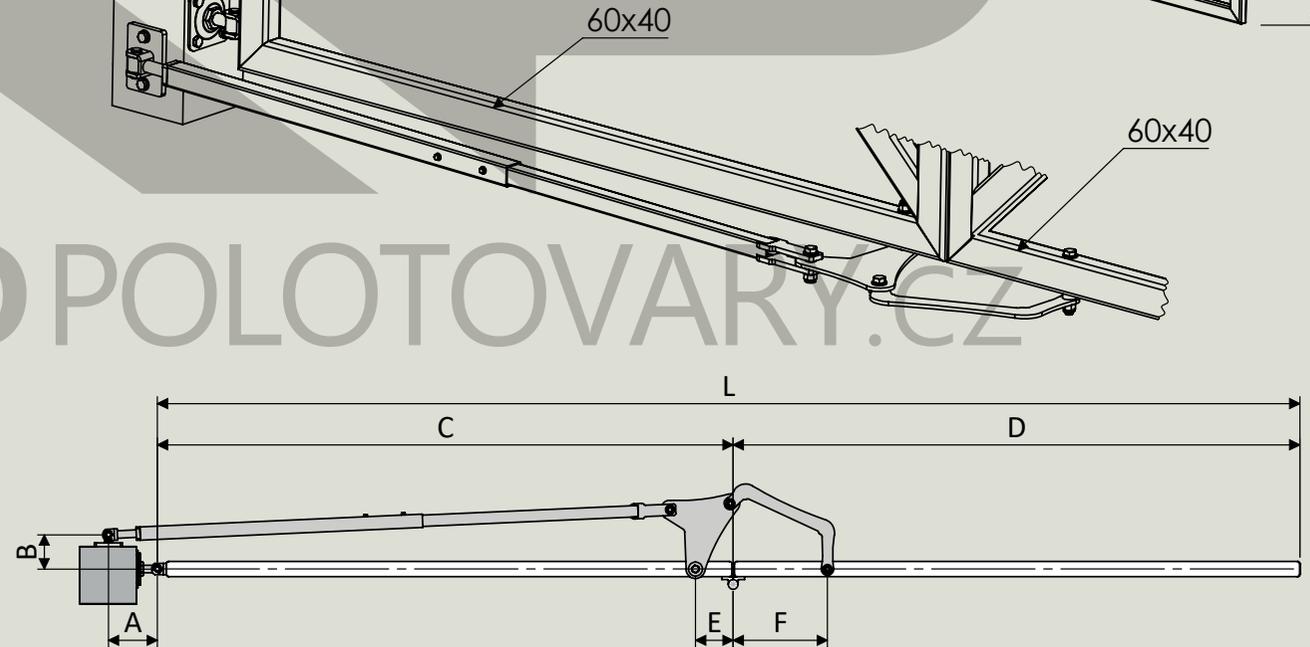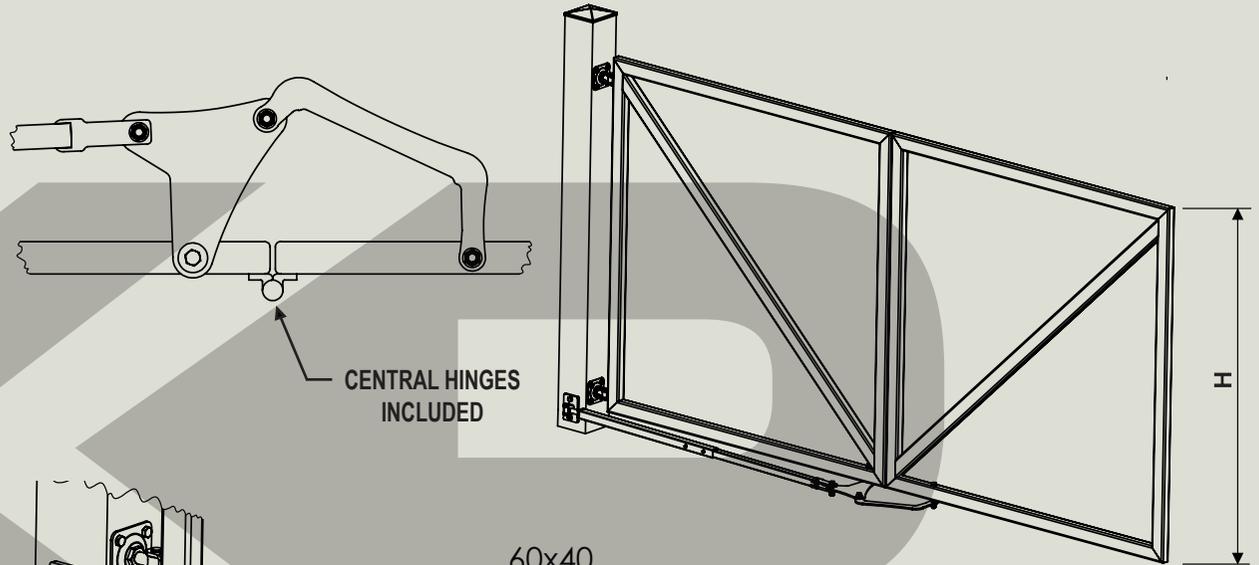

NO WELDING  
REQUIRED



SPACE SAVING  
FEATURE  
- 50% OF BACK SPACE



EASY  
ASSEMBLY



FAST  
NO WELDING  
REQUIRED



EASY TELESCOPIC  
ADJUSTMENT



SUITABLE FOR  
OFFSET LEAFS  
100% + 50%



SUITABLE FOR  
ALL STANDARD HINGES  
WITH A SINGLE AXLE



WIND RESISTANCE  
MAX. 50%  
LEAF CLOSURE



SUITABLE FOR  
ALL STANDARD  
AUTOMATIC  
GATE OPERATORS



- 37°C  
TESTED & PROVEN



+ 50°C  
TESTED & PROVEN



TRACKLESS  
BI-FOLDING



COMPACT  
PACKAGE



EASY  
TRANSPORT



FOR RESIDENTIAL  
USE ONLY



TAKE  
AWAY



HIGH QUALITY  
GUARANTEED



CAIS  
INNOVATION




90° MAX. ANGLE



BOTTOM FIXED LEAF  
SAFETY FEATURE


LEFT <<<

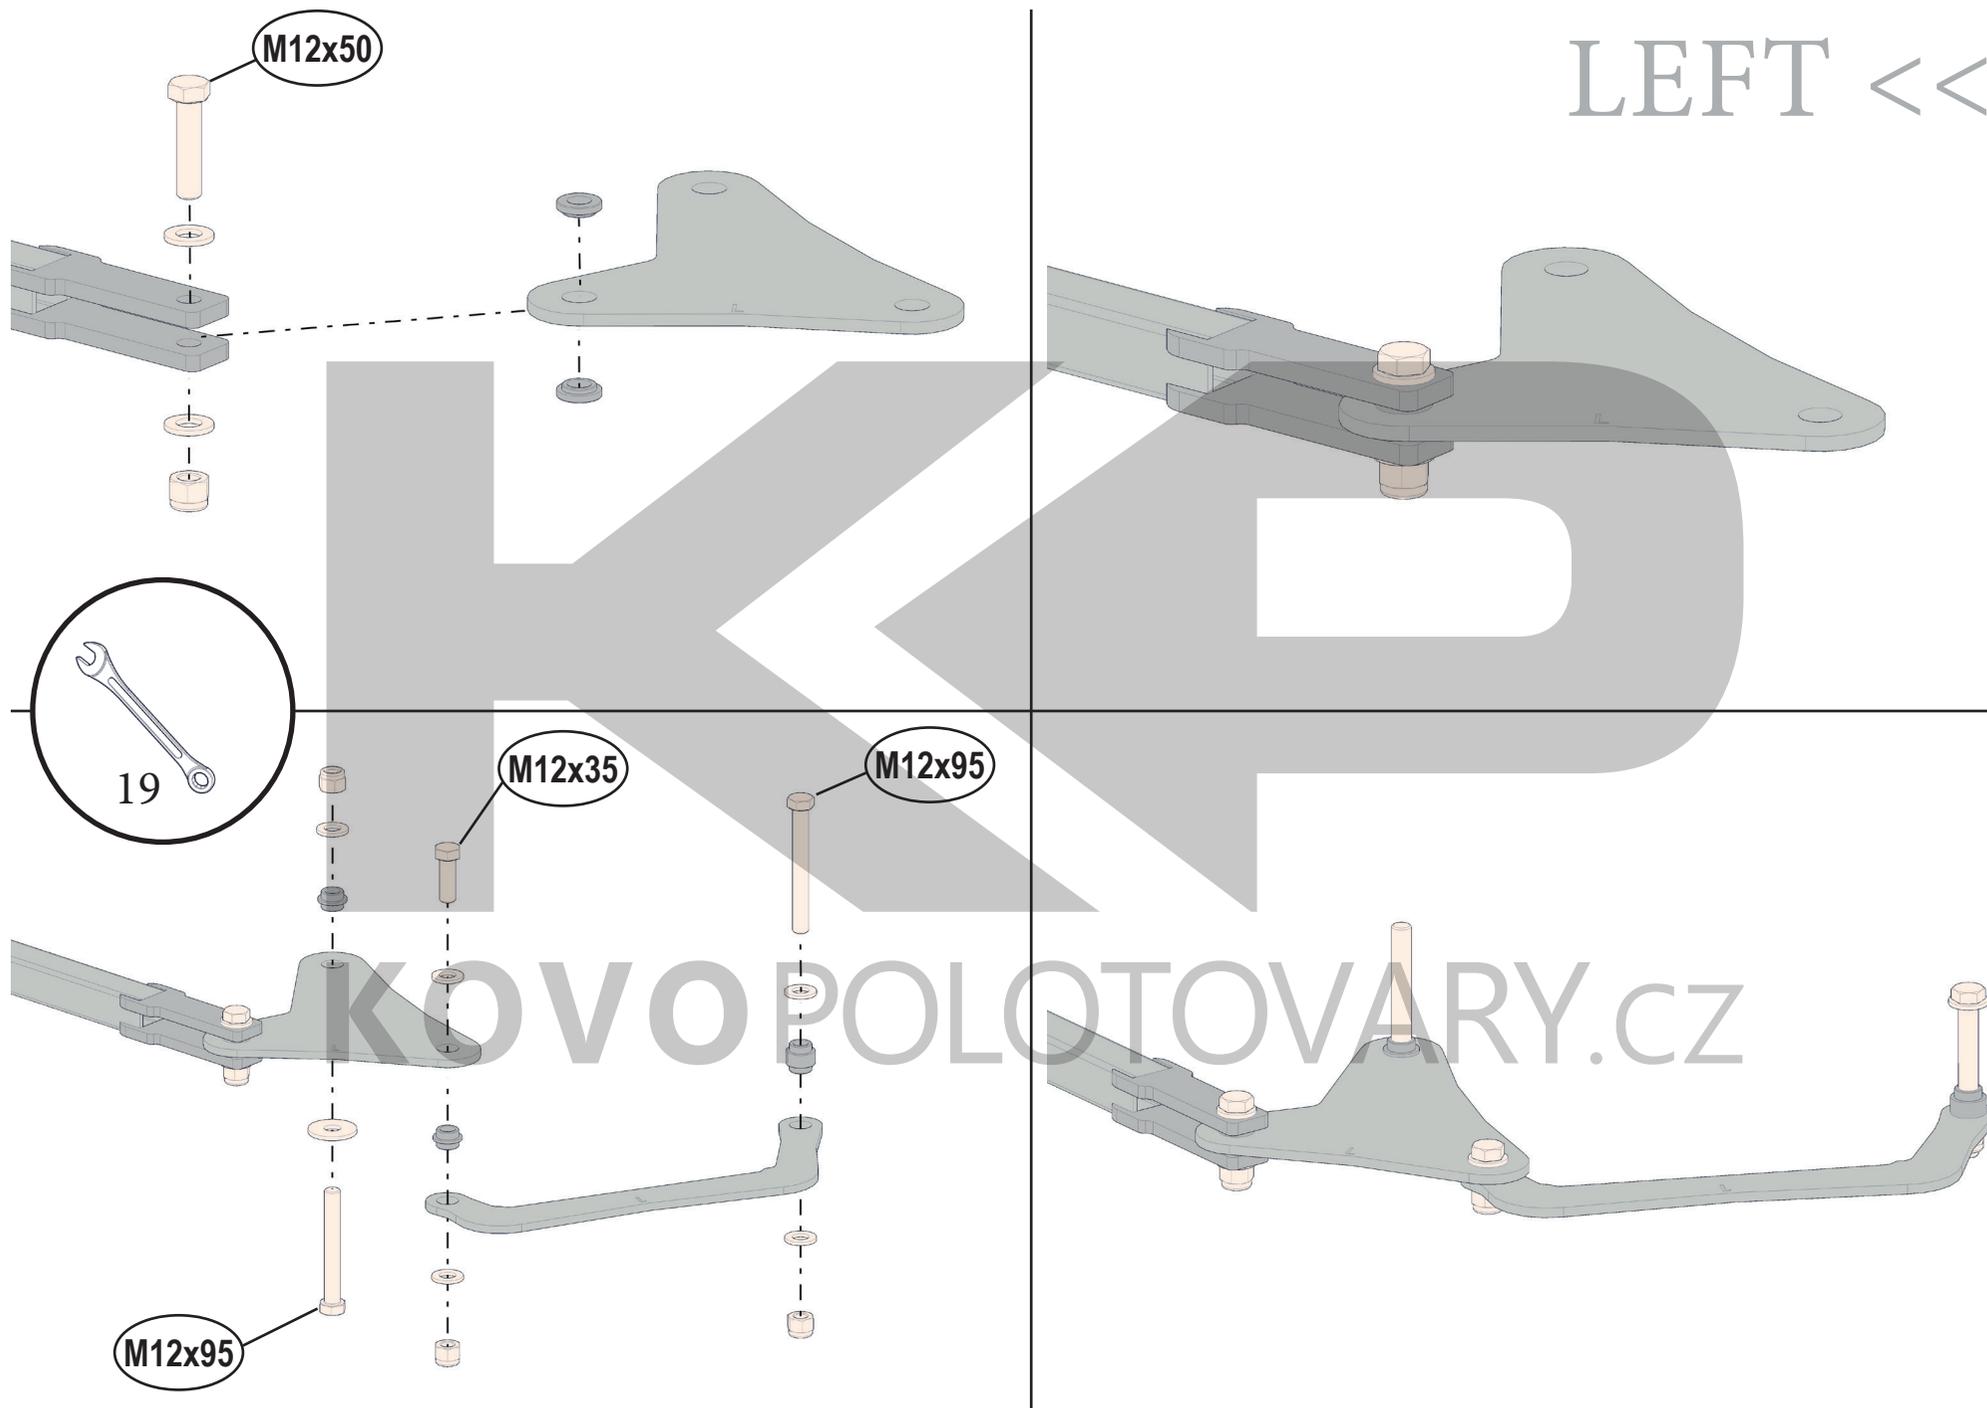

STEP 1 (A) - LEFT

RIGHT >>>

M12x50

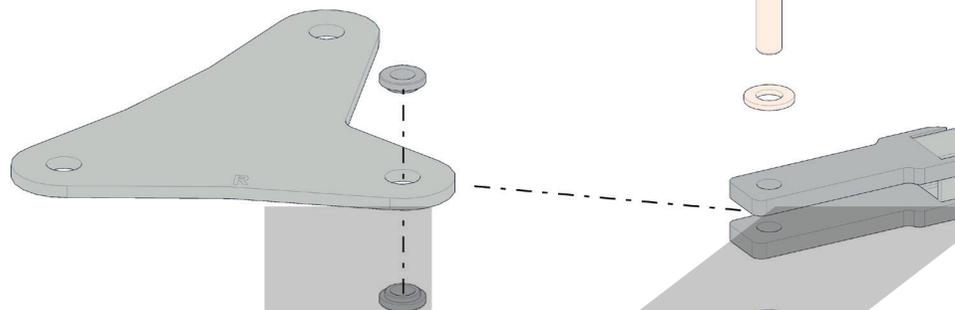

19


M12x95



M12x35




M12x95

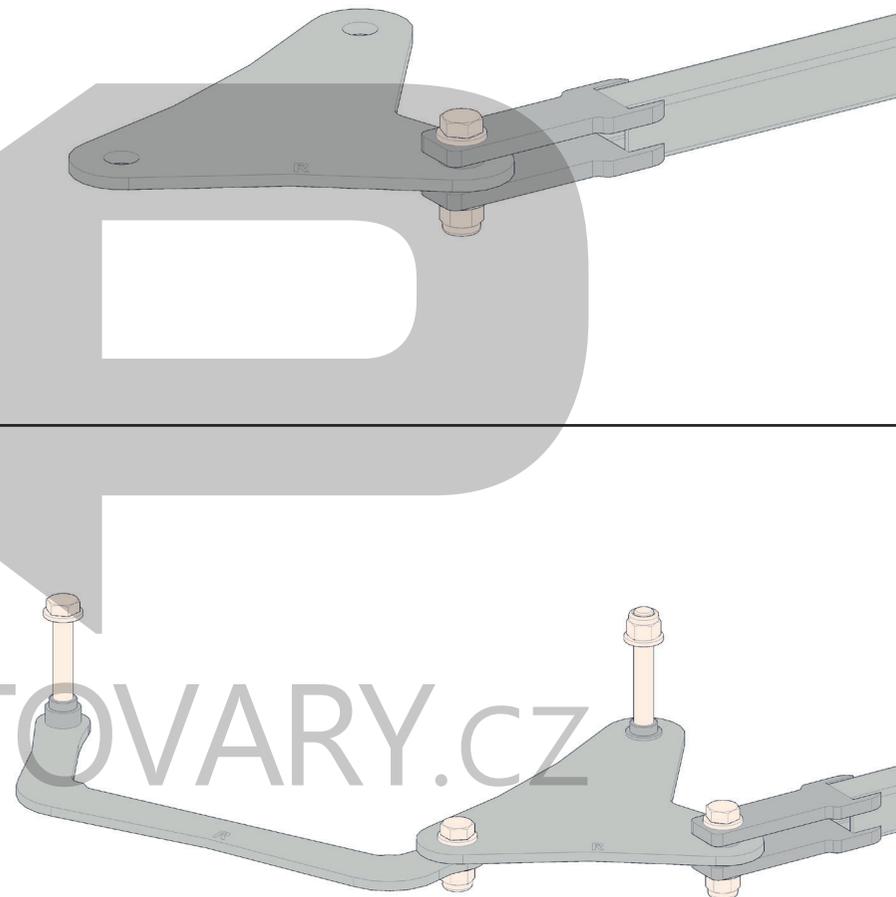


STEP 1 (B) - RIGHT


KOVOPOLOTOVARY.CZ

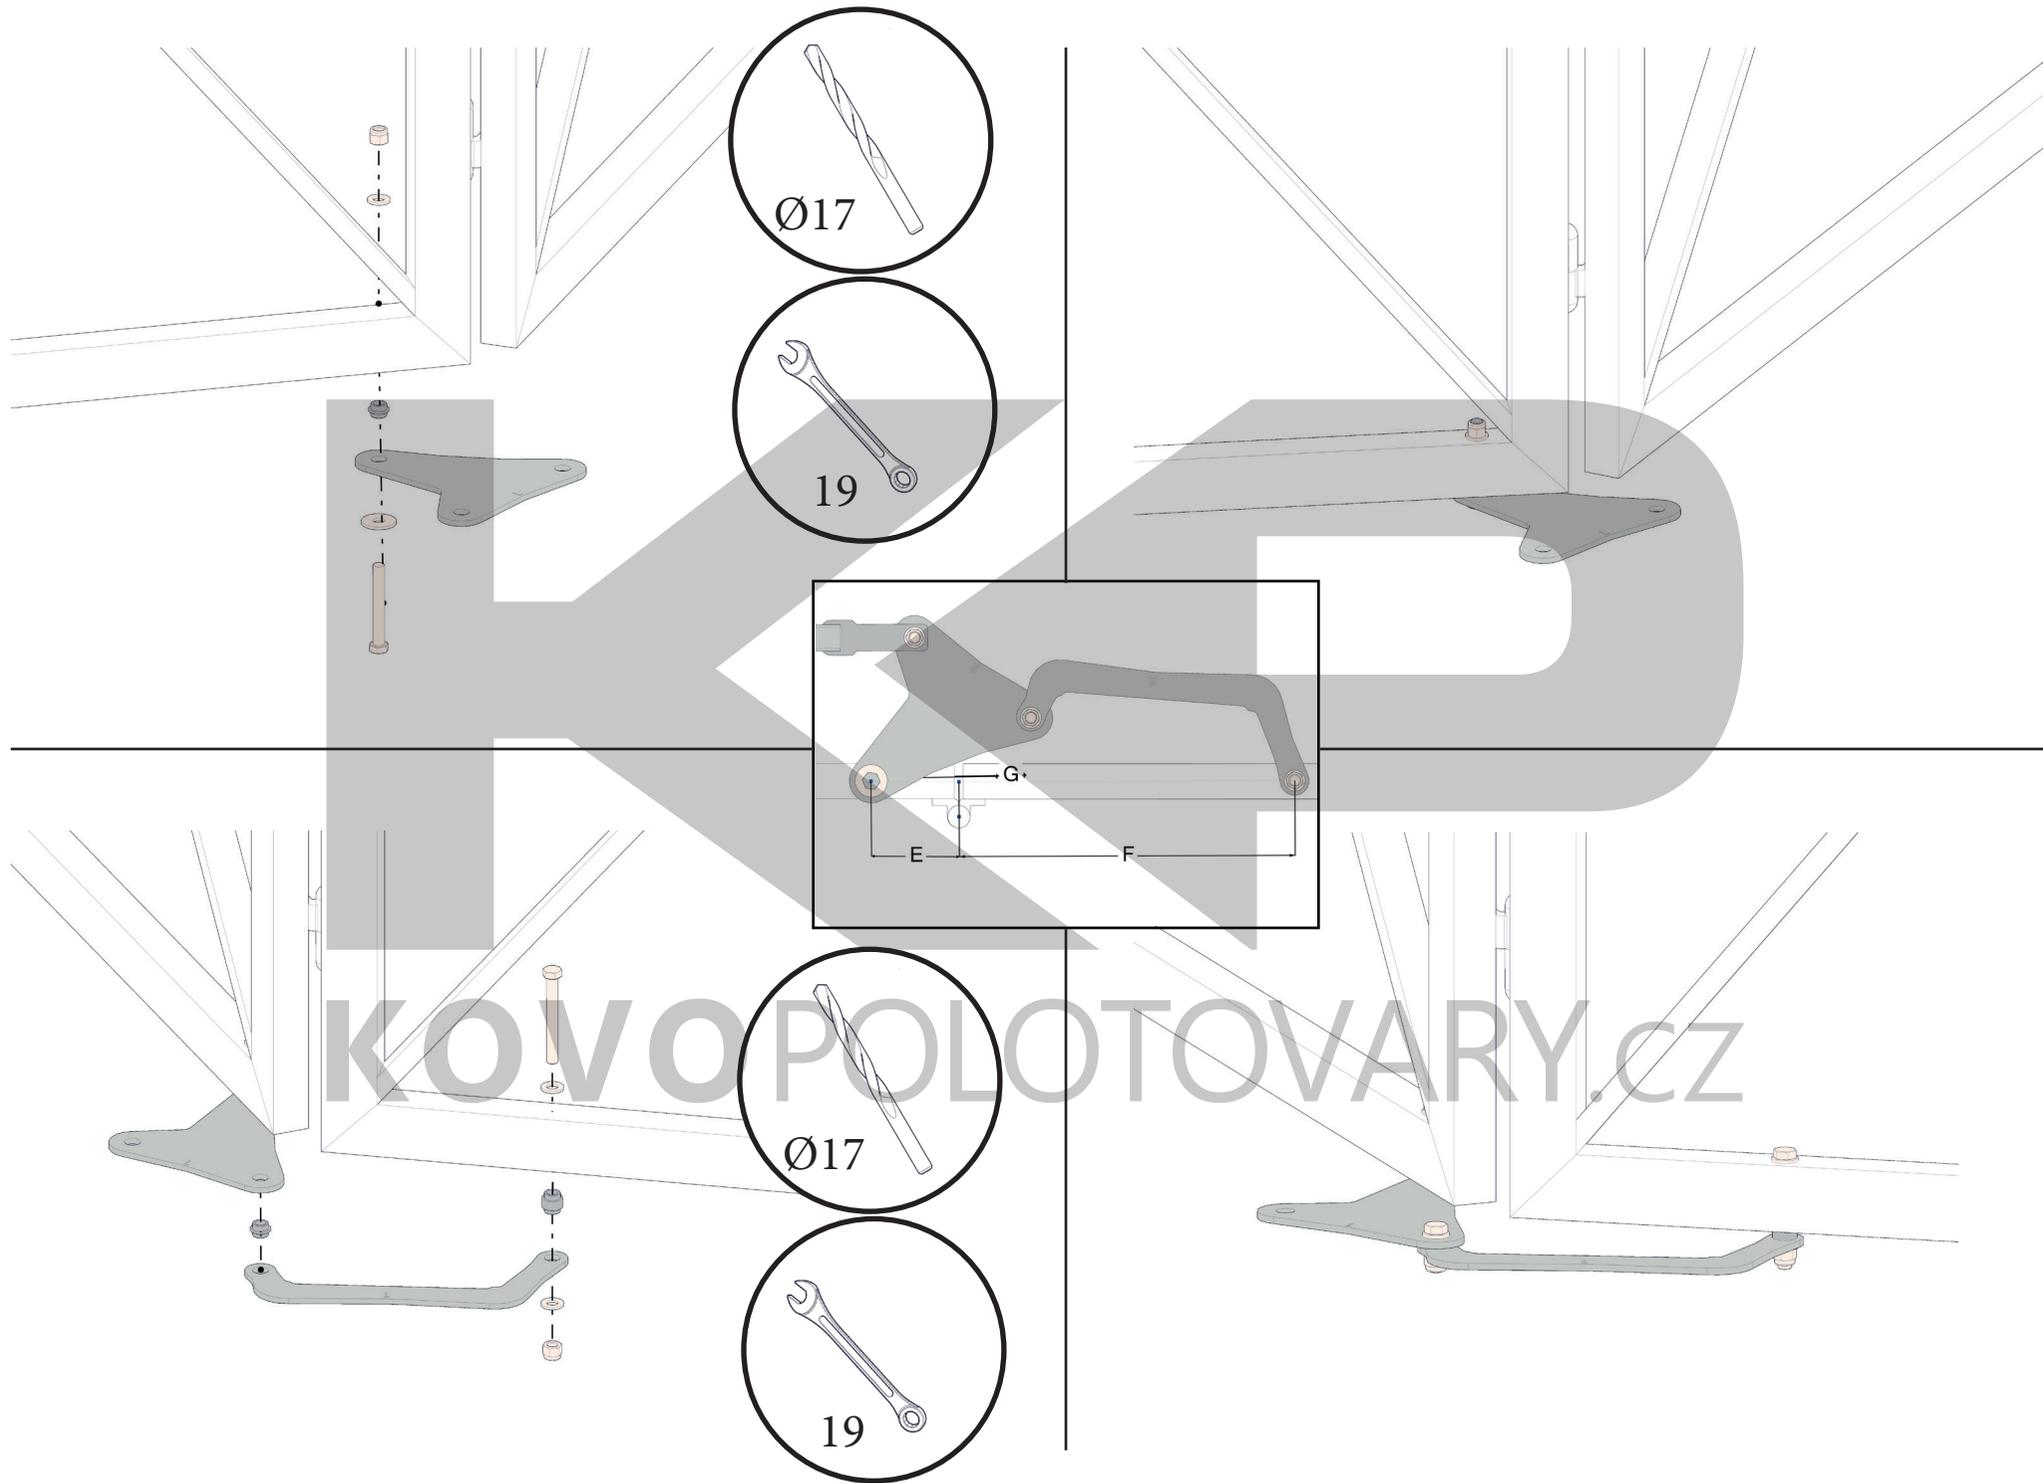


STEP 2


STEP 3

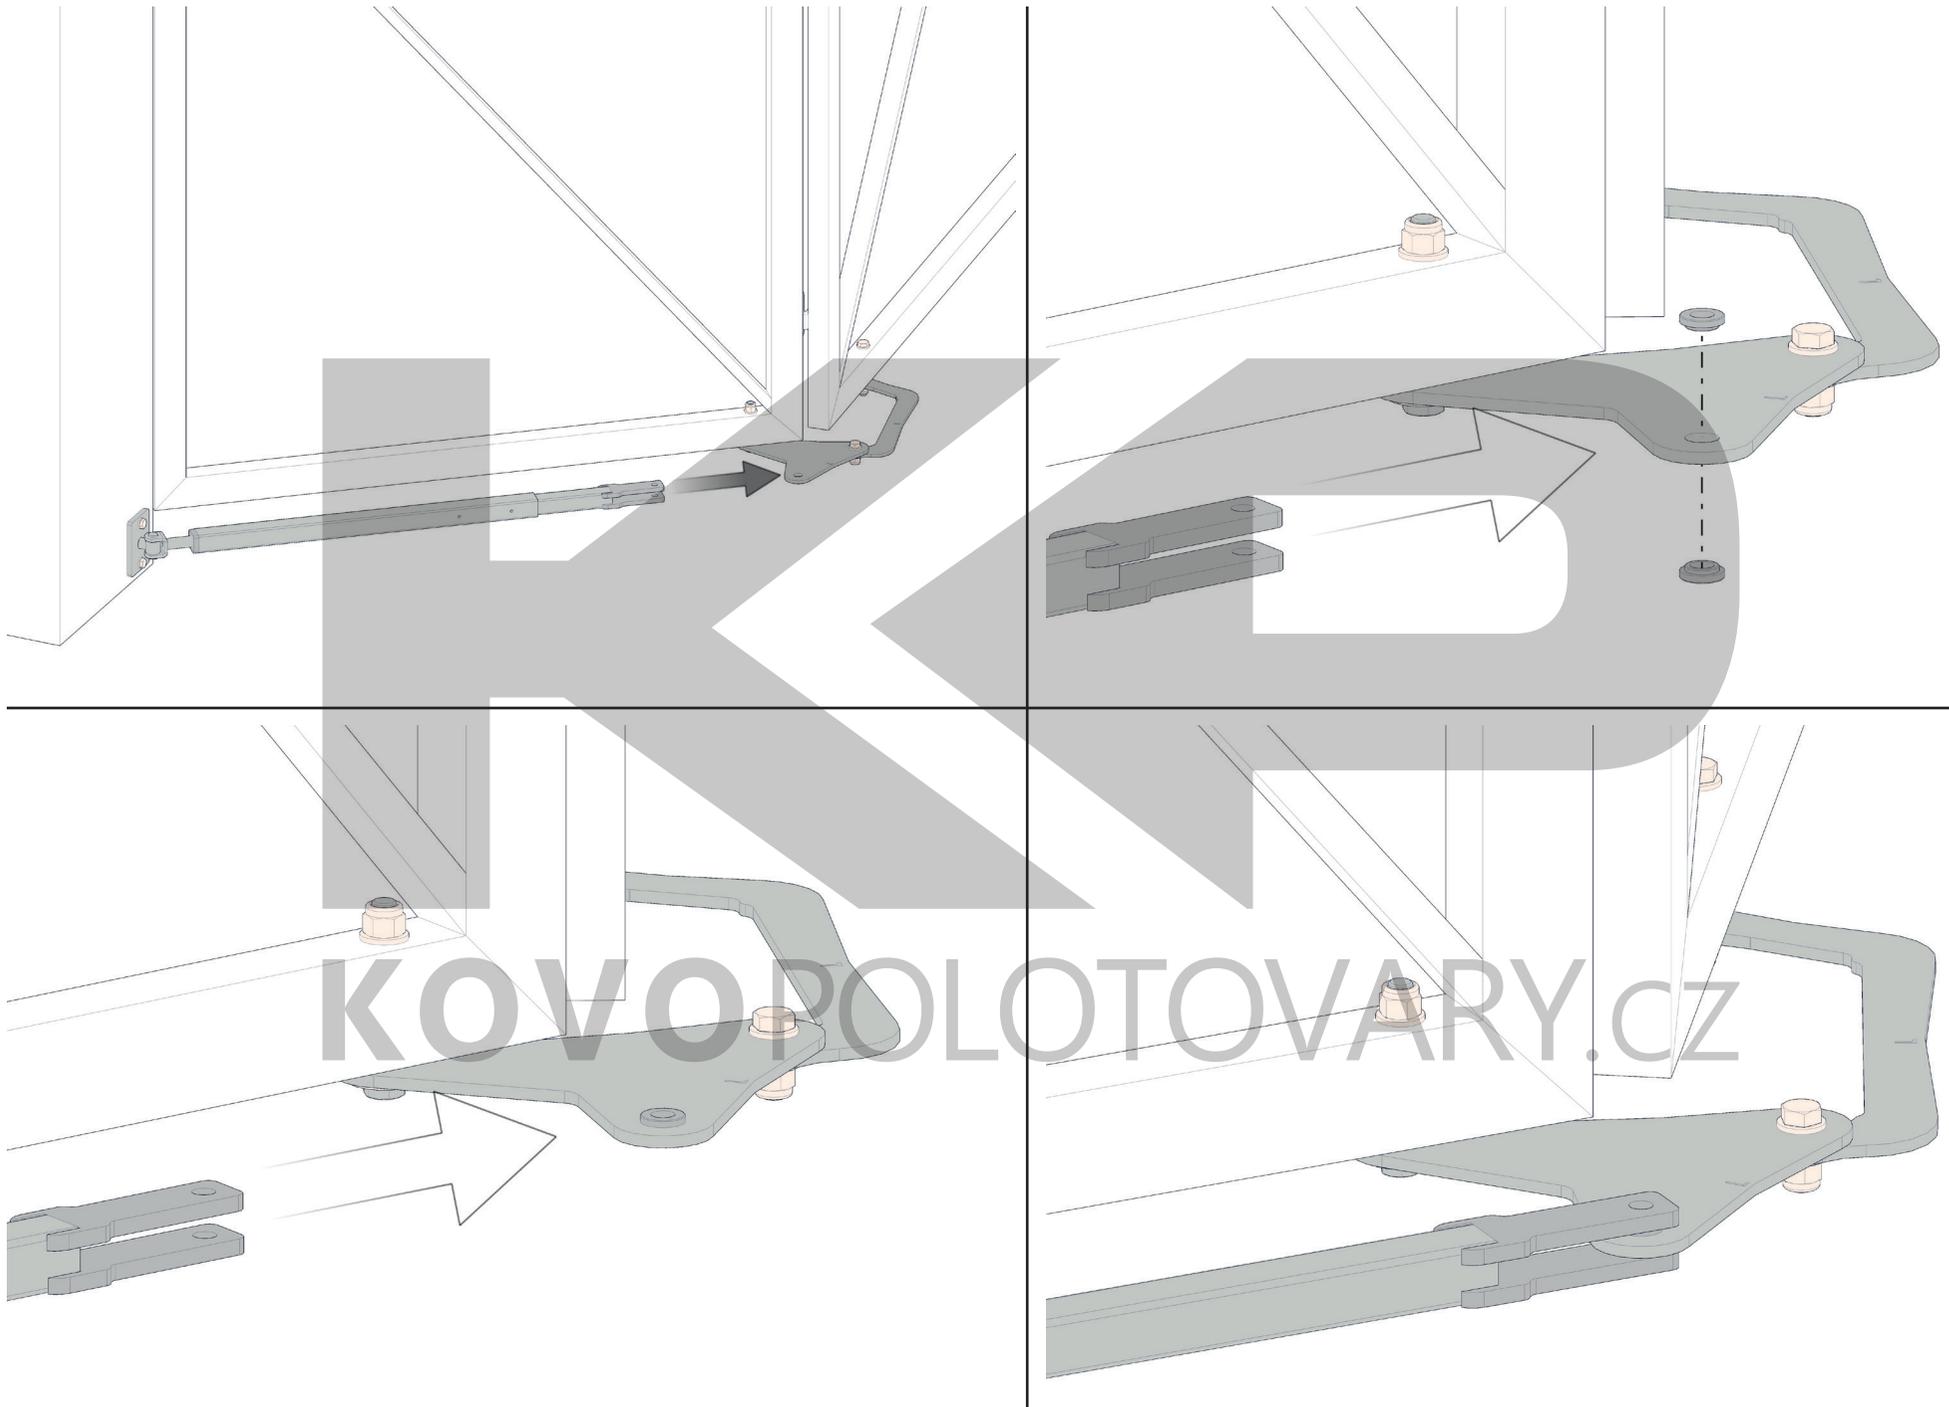


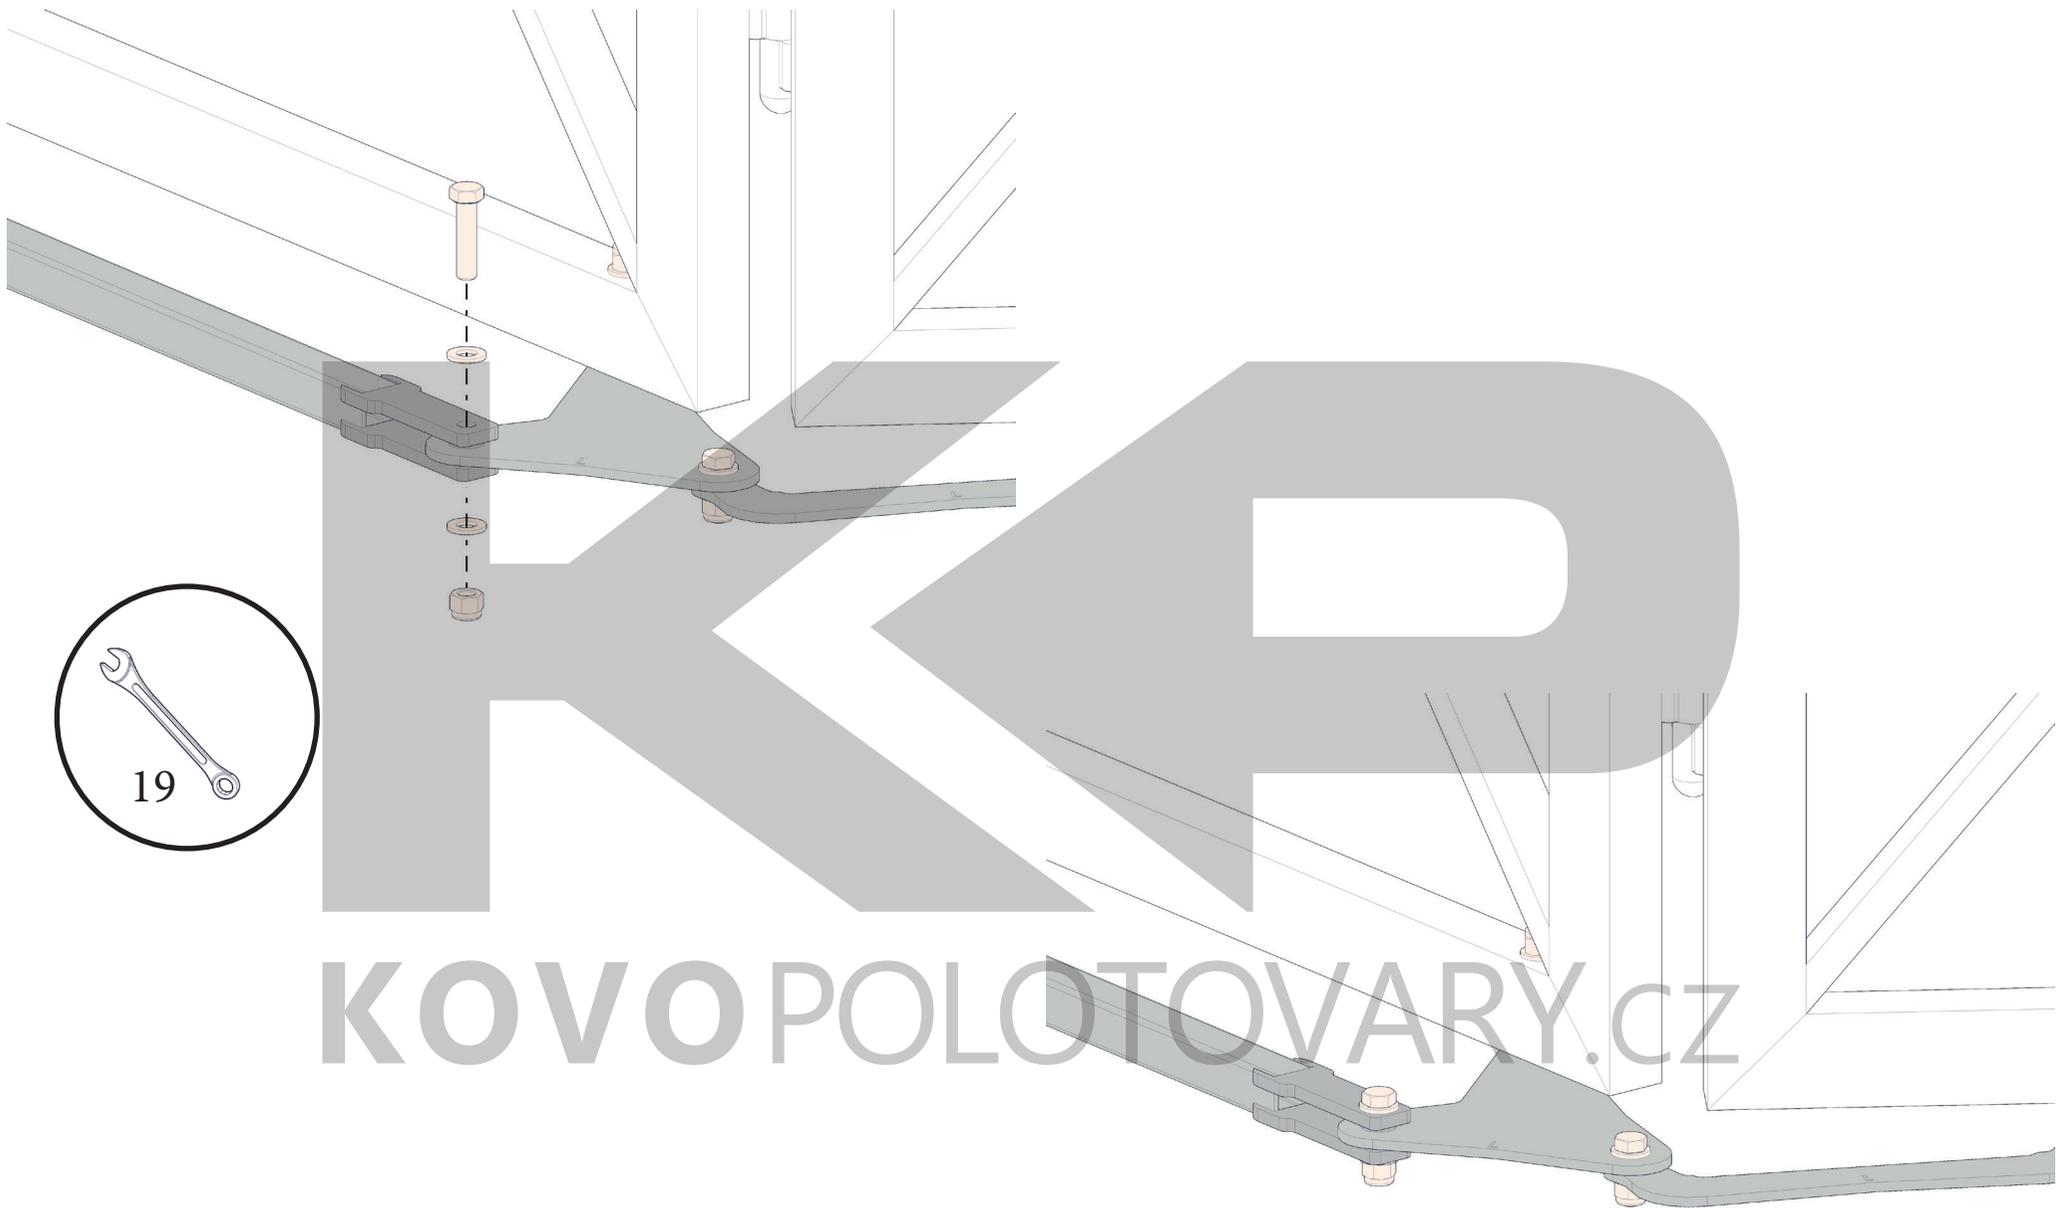


KOVOPOLOTOVARY.CZ

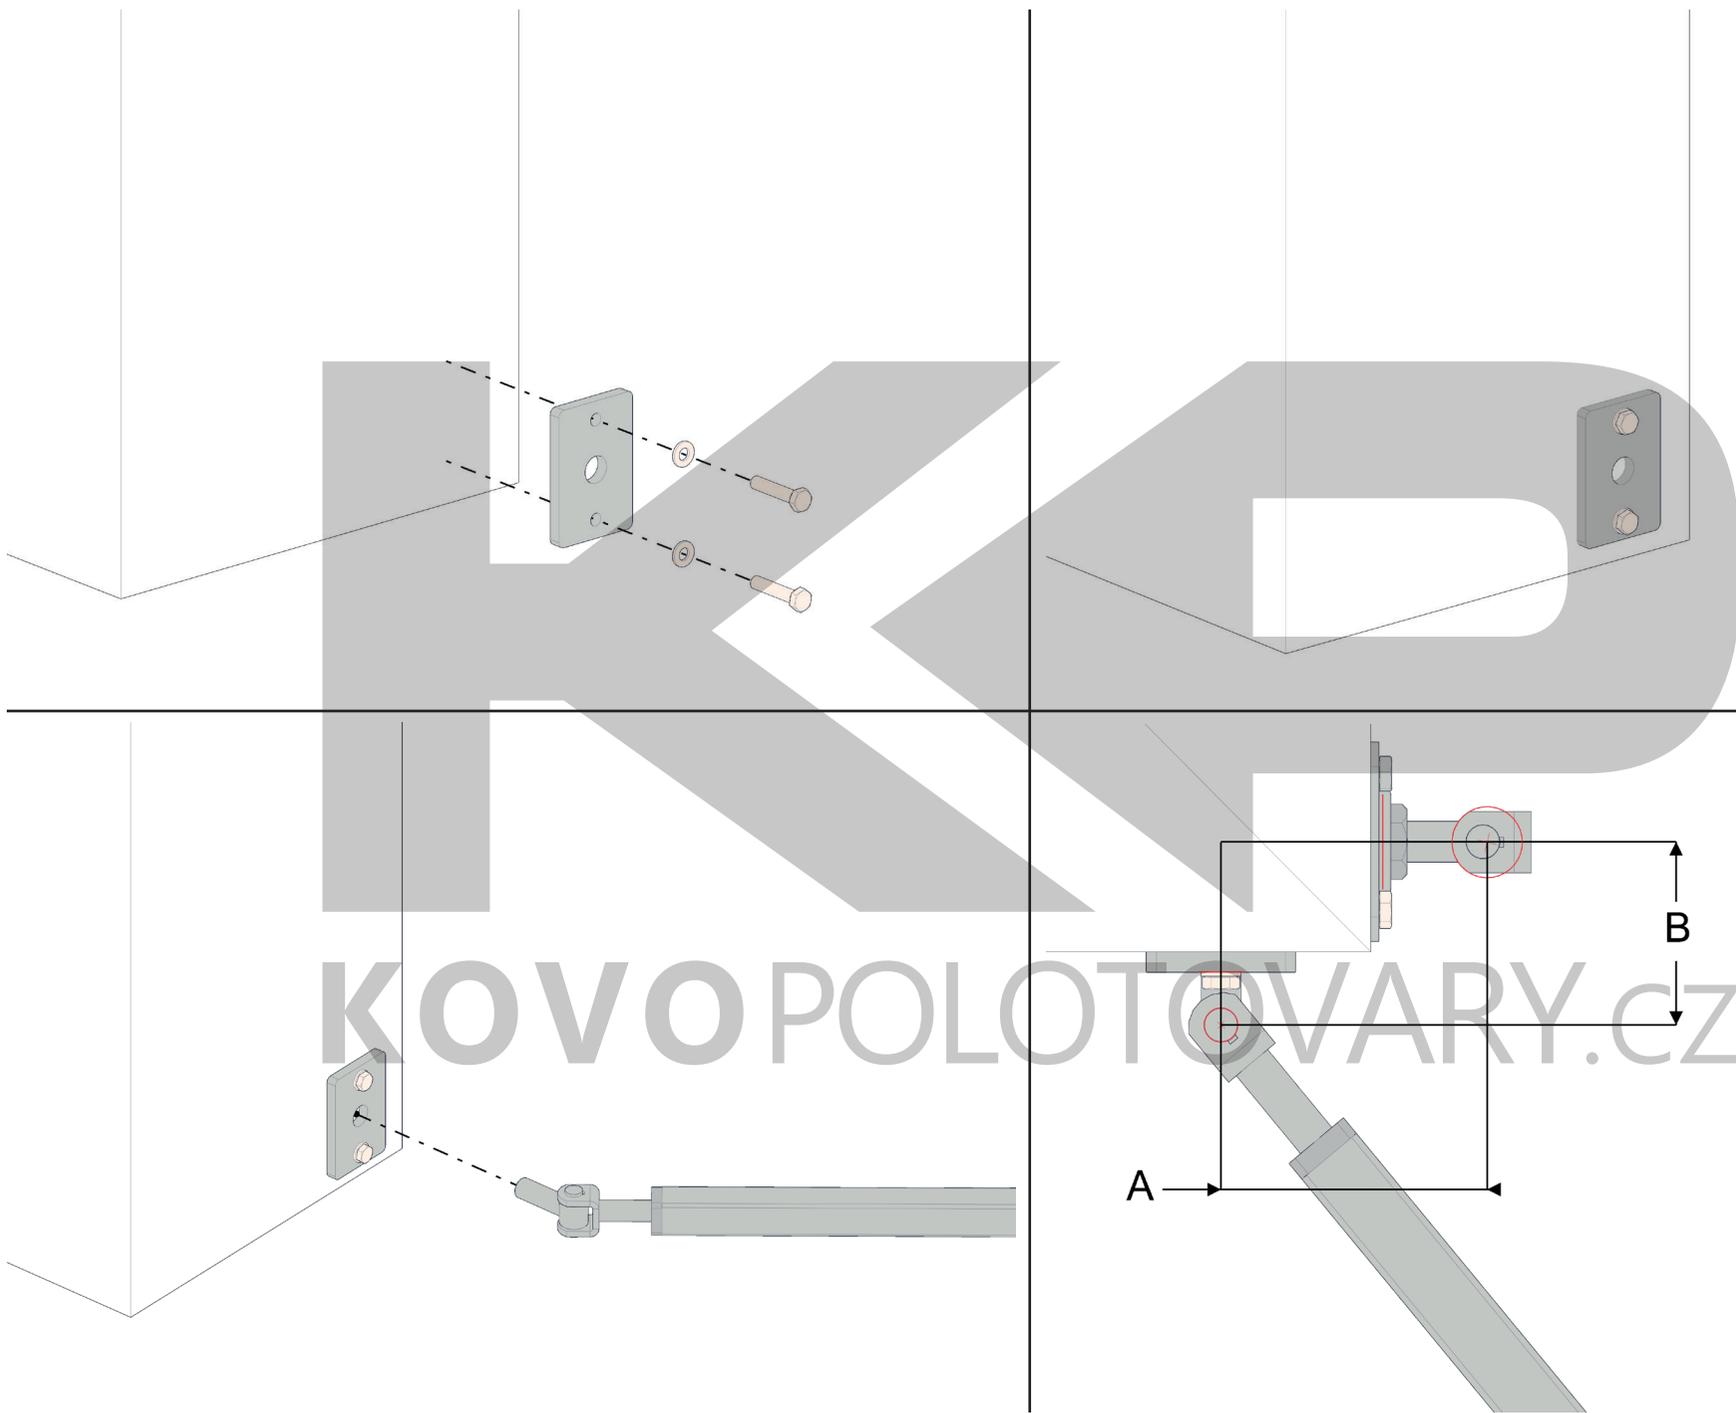


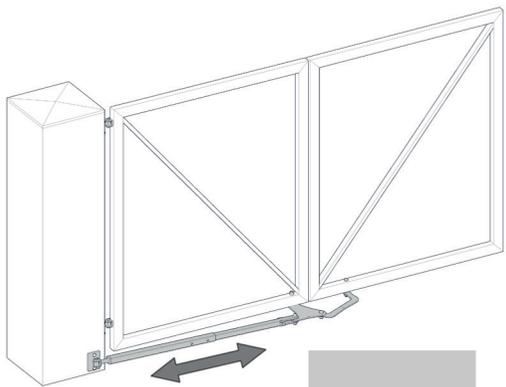


CLOSE

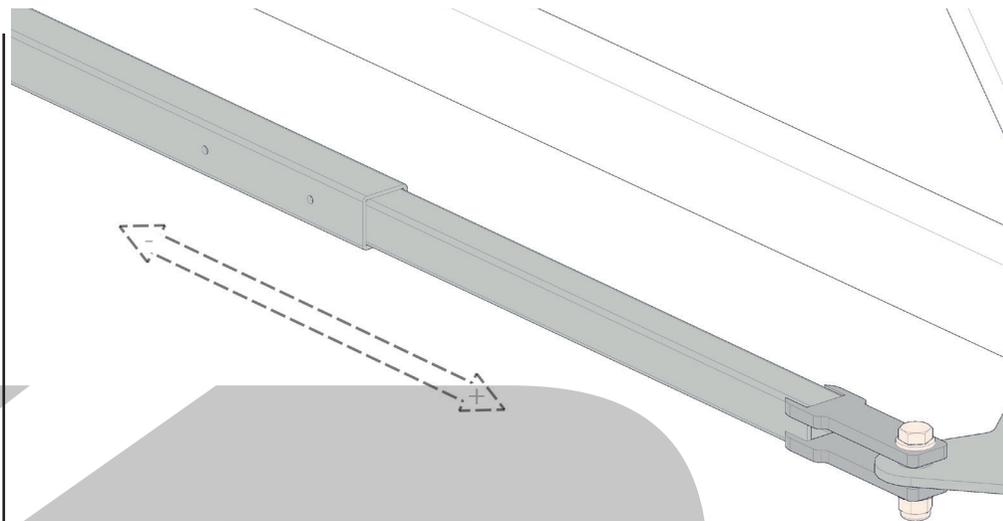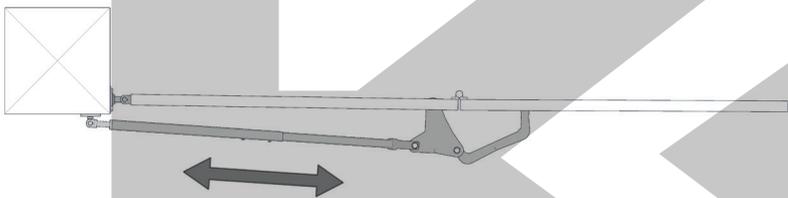


STEP 7

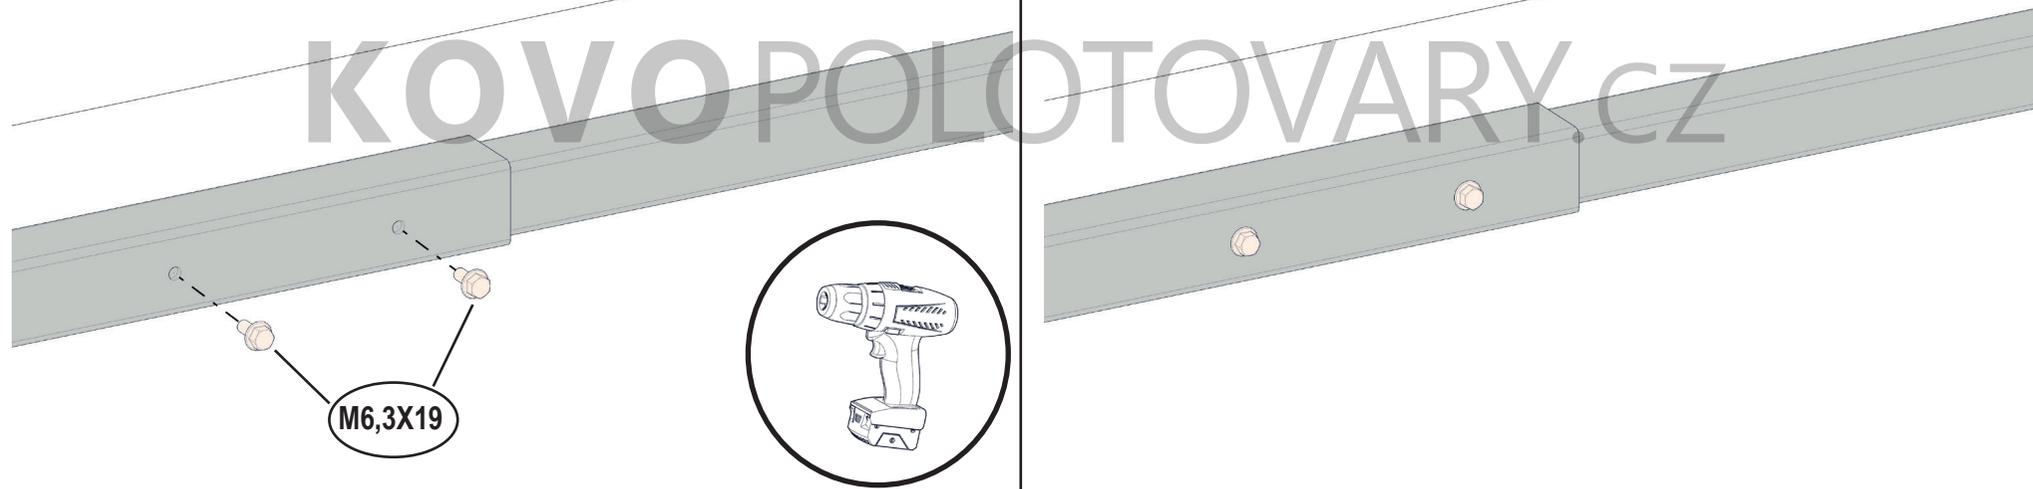

M6,3X19




STEP 8

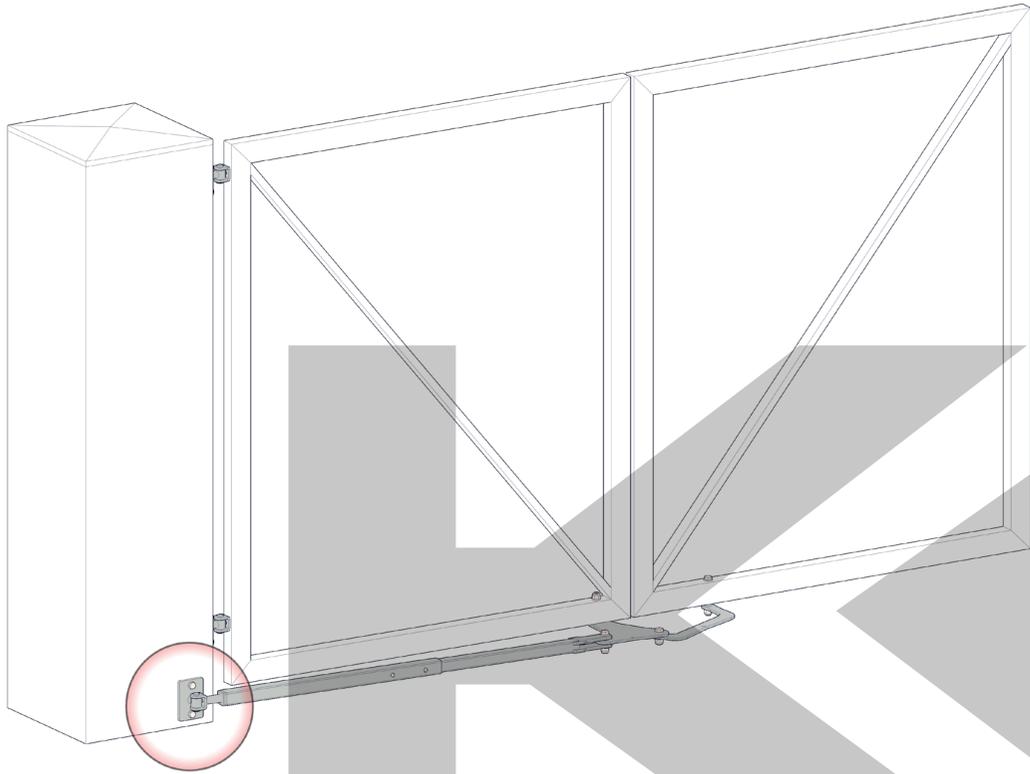


REGULATION

KRP  
KOVOPLOTOVARY.CZ

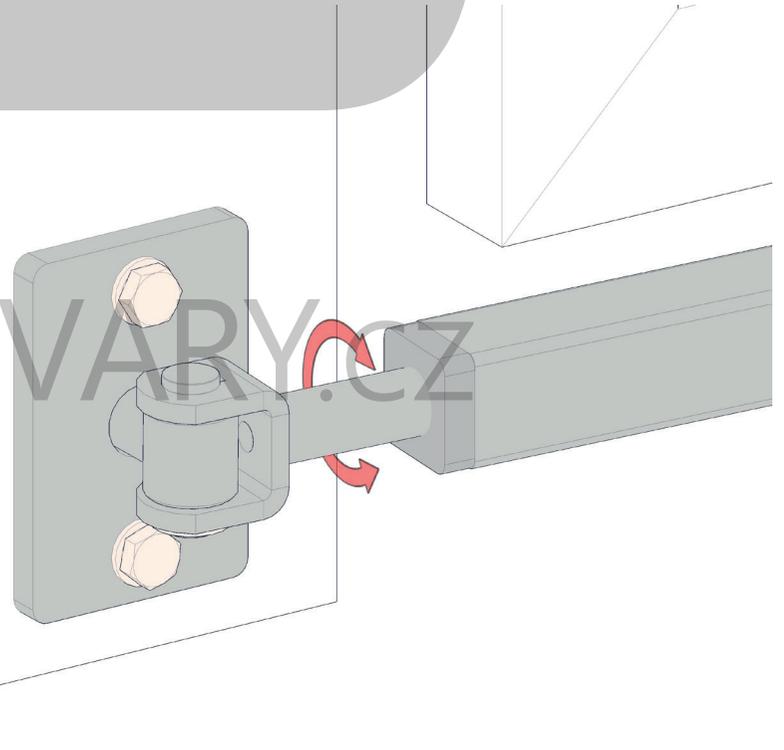

STEP 9

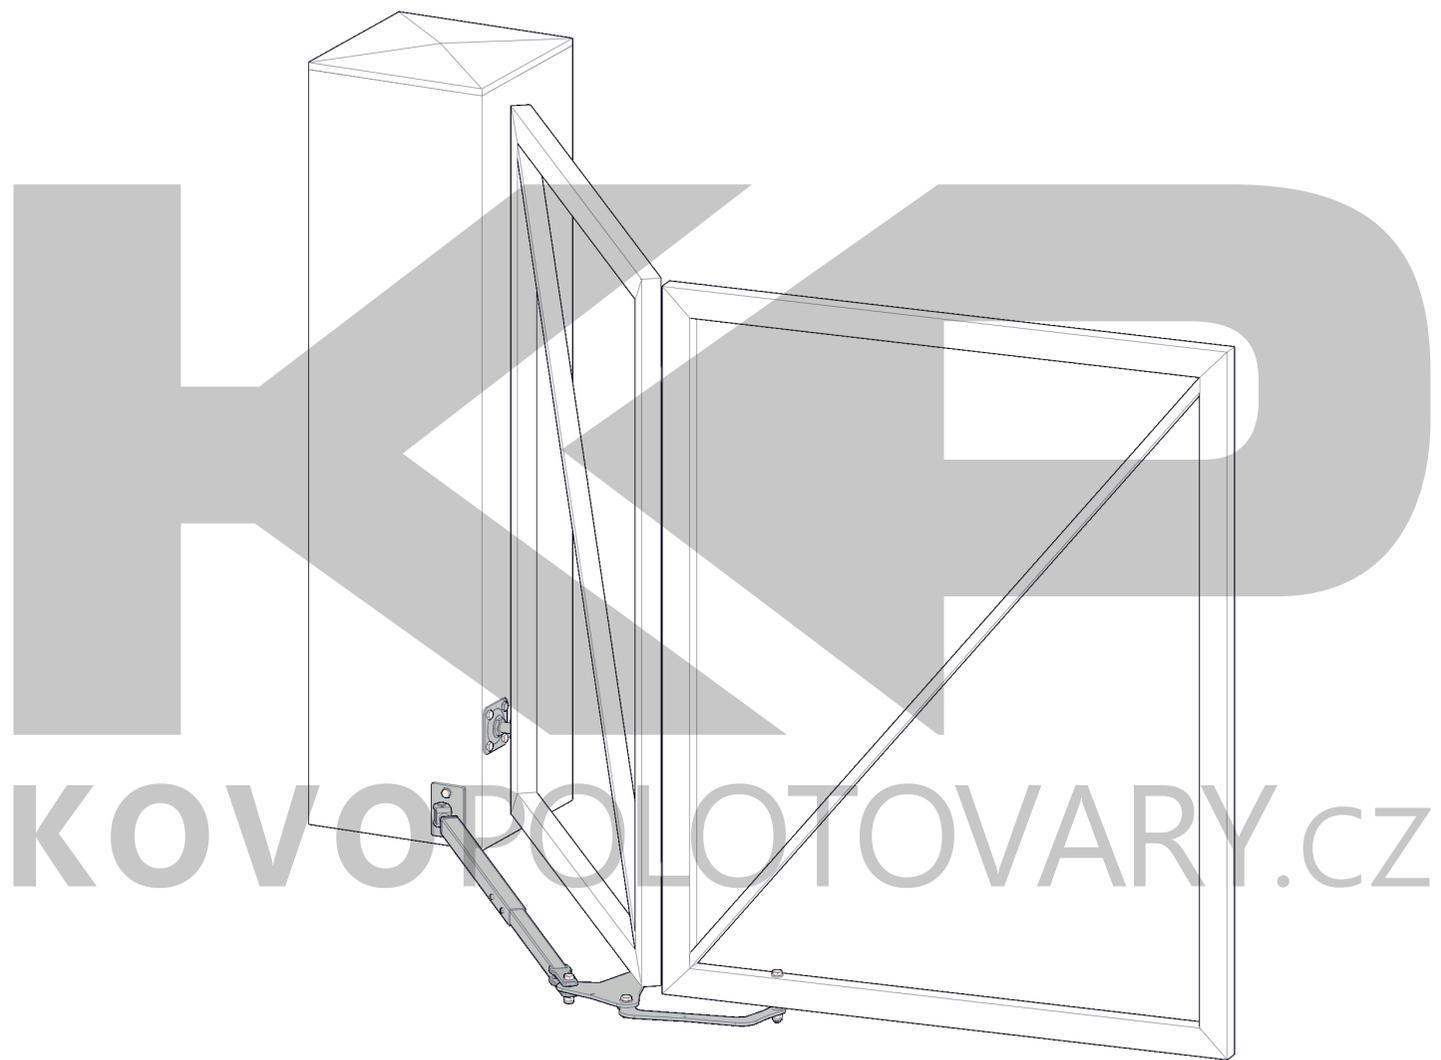



KOVOPOLOTOVARY.cz